



TECHNICAL DATASHEET

FICHE TECHNIQUE | FICHA TÉCNICA

Air filtration Filtration de l'air Filtración de aire	2 steps filtration Filtration en 2 étapes Filtración en 2 etapas
Water purification Purification de l'eau Purificación del agua	5xCTO+2xRESIN+2xRO+3xUV
Water storage Réserve d'eau Reserva de agua	980 L
Water options Options d'eau Opciones de agua	Room temperature Température ambiante Temperatura ambiente
Compressor Compresseur Compresor	Daikin / Danfoss
Refrigerant Réfrigérant Refrigerante	R407c
Voltage Tension Voltaje	380V/50Hz 208V/60Hz 3 ~
Power Consumption Consommation d'énergie Consumo eléctrico	25.4kWh
Operation conditions Conditions d'utilisation Condiciones de operación	≥15°C - ≤38°C ≥45% RH
Acoustic Acoustique Acústica	≤ 120 dBA
Dimensions and weight Dimensions et poids Dimensiones y peso	280cm x 180cm x 162cm 2000 Kg
Transportation Transport Transporte	Standard cargo Fret standard Carga estándar
Certifications Certifications Certificaciones	CE




RATED WATER PRODUCTION

PRODUCTION D'EAU NOMINALE
PRODUCCIÓN NOMINAL DE AGUA

1500L
PER DAY | PAR JOUR | POR DIA

90% **RELATIVE HUMIDITY**
HUMIDITÉ RELATIVE
HUMEDAD RELATIVA

Water Generation per Day

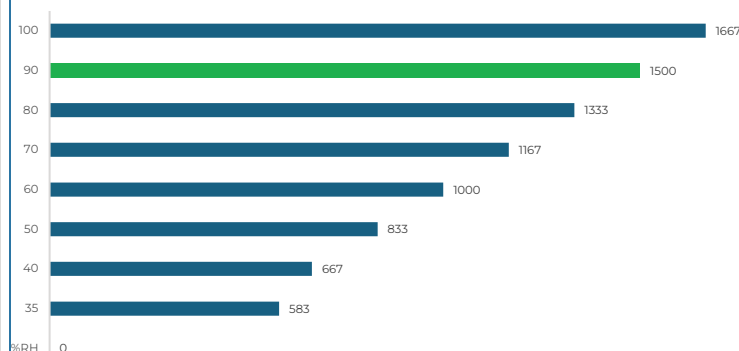

TESTED WATER QUALITY

QUALITÉ DE L'EAU TESTÉE
CALIDAD DEL AGUA PROBADA

99.9%
PURE WATER | EAU PURE | AGUA PURA

WATER PURIFICATION

PURIFICATION DE L'EAU
PURIFICACIÓN DE AGUA



FILTER FILTRE FILTRO	5X CTO FILTER 5X CTO FILTRE 5X FILTRO CTO	2X GAC RESIN 2X POST-FILTRE GAC RÉSINE 2X POSTFILTRO GAC RESINA	2X REVERSE OSMOSIS 2X OSMOSE INVERSE 2X OSMOSIS INVERSA
MATERIAL MATÉRIEL MATERIAL	GAC+ZEOLITE GAC+ZÉOLITE GAC+ZEOLITA	CARBON BLOCK BLOC DE CARBONE BLOQUE DE CARBÓN	POLYAMIDE FILM FILM POLYAMIDE PELÍCULA DE POLIAMIDA
RATE TAUX TASA	5 µm 5 µm 5 µm	0.1 µm 0.1 µm 0.1 µm	0.00001 µm 0.00001 µm 0.00001 µm
LIFESPAN DURÉE DE VIE VIDA ÚTIL	12-MONTH 12 MOIS 12 MESES	12-MONTH 12 MOIS 12 MESES	24-MONTH 24 MOIS 24 MESES

WATER STERILIZATION

STÉRILISATION DE L'EAU
ESTERILIZACIÓN DE AGUA



LOCATION EMPLACEMENT UBICACIÓN	LOWER TANK RÉSERVOIR INFÉRIEUR TANQUE INFERIOR	MAIN TANK RÉSERVOIR PRINCIPAL TANQUE PRINCIPAL	DISPENSING DISTRIBUTION DISPENSACIÓN
TYPE MATÉRIEL MATERIAL	LED UV-C LED UV-C LED UV-C	UV-C LAMP LAMPE UV-C LÁMPARA UV-C	UV-C INLINE LAMP LAMPE UV-C EN LIGNE LÁMPARA EN LÍNEA UV-C
POWER POUVOIR POTENCIA	5W 256nm 5W 256NM 5W 256NM	11W 253.7nm 11W 253.7NM 11W 253.7NM	11W 253.7nm 11W 253.7NM 11W 253.7NM
LIFESPAN DURÉE DE VIE VIDA ÚTIL	18,000 HOURS 11 000 HEURES 11,000 HORAS	11,000 HOURS 11 000 HEURES 11,000 HORAS	11,000 HOURS 11 000 HEURES 11,000 HORAS

G1500



Saint-Martin, France
+590.690.561236
+506.7044.3470
www.osoley.com

OSOLEY RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE. Products and specifications presented herein are provided for reference purposes only. All information herein may change without notice and is provided on an "AS IS" basis, without warranties of any kind. This document and all information herein remain the sole and exclusive property of OSOLEY. For updates or additional information about Osoley products, contact your nearest Osoley dealer.